Brackwater Lighting Co.

3 Ferry Road · Lowmoor LM4 2BX · bids@brackwater.example · synthetic sample

Procurement Office
Town of Easthaven (fictitious)
Town Hall, Market Square
Easthaven EH1 1AA

14 October 2026

Tender TR-0417 — Harbour Promenade Lighting Renewal

Dear Sir or Madam,

We are pleased to submit our response to the above tender. Our offer covers the supply, installation and commissioning of 48 LED column luminaires with a central control system, as described in the tender documents and in our technical proposal.

The response consists of this letter, the technical proposal, the price schedule and the following annexes: the product data sheet for the PL-60 luminaire, the maintenance plan, the method statement for night works and the insurance summary. All documents are combined in this file.

We have visited the site and read the tender documents, including the replies to bidders’ questions published on 2 October 2026. We confirm that our offer complies with the requirements of the tender without exceptions.

Our offer remains valid for 90 days from the closing date. Please address all questions about this response to the bid manager named below.

Yours faithfully,

Dana Whitcombe
Bid manager, Brackwater Lighting Co.

Clarification No. 1

Tender TR-0417 · Harbour Promenade Lighting Renewal · issued by Brackwater Lighting Co. on 21 October 2026 · synthetic sample

Following the clarification meeting with the Town on 19 October 2026, we have revised two parts of our response.

Price schedule. The amount for item 3 now includes the removal and disposal of the existing lanterns and brackets. Night-time traffic management, which the Town will no longer provide, has been added to the schedule as a new item.

Order of the annexes. As requested at the meeting, the insurance summary now follows the price schedule directly.

All other parts of the response are unchanged, and the validity of our offer is not affected by this clarification.

Dana Whitcombe, bid manager

Technical proposal

Tender TR-0417 · Harbour Promenade Lighting Renewal · Brackwater Lighting Co. (synthetic sample)

1 Scope of works

The works cover the renewal of street lighting along the 1.2 km harbour promenade between the ferry terminal and the lifeboat station. Forty-eight existing sodium lanterns on 6 m columns will be replaced with LED column luminaires of the type described in the product data sheet. Where a column fails the structural test described in section 2.3, the column is replaced as well. The existing feeder pillars are retained; their protective devices are checked and replaced where necessary.

The scope includes the supply of all luminaires, brackets and cabling, the installation and connection of the luminaires, a central control system with one node per luminaire, commissioning, and the documentation required for handover. Civil works outside the column bases, such as resurfacing of the promenade, are not included and are priced by others.

2 Approach and method

2.1 Survey and setting-out

Before any work starts, we survey every column position, record the condition of each column and photograph its base. The survey is completed within the first two weeks and is shared with the Town's engineer as a marked-up plan, together with a list of the columns we expect to replace.

2.2 Sequence of works

Works proceed in four sections of twelve columns each, starting at the ferry terminal. In each section the new luminaires are installed and connected before the old lanterns are switched off, so that no part of the promenade is left without lighting for more than one night. Each section takes about two weeks, including the reinstatement of the column bases.

2.3 Column testing

Each column is tested with a non-destructive ultrasonic method at ground level and just below the bracket. Columns with a wall loss of more than 25 per cent are recorded as failed and replaced during the same visit, so that the promenade is not disturbed twice. Test results are recorded per column and handed over with the documentation.

2.4 Working at night

Work on the carriageway side of the promenade is carried out between 20:00 and 05:00 under the method statement for night works, which is attached to this response. Noisy operations such as cutting and drilling stop at 23:00. Residents along the promenade receive a letter one week before work starts in their section.

3 Programme

The works take eleven weeks from the order date. The programme below assumes an order date of 1 December 2026 and a two-week break over the holidays, which is not counted. It will be adjusted if the order is placed later.

Weeks	Activity	Columns
1–2	Survey, setting-out and ordering of luminaires	—

3–4	Section 1, ferry terminal to the fish market	1–12
5–6	Section 2, fish market to the bandstand	13–24
7–8	Section 3, bandstand to the boatyard	25–36
9–10	Section 4, boatyard to the lifeboat station	37–48
11	Commissioning of the control system and handover	—

4 Team

The contract manager is responsible for the works from order to handover and is the single point of contact for the Town. She is supported by a site supervisor, two installation crews of three electricians each, and a commissioning engineer who joins the team for the last three weeks.

Role	Responsibility	Years of experience
Contract manager	Programme, reporting, contact with the Town	14
Site supervisor	Daily site management, permits, safety briefings	11
Electricians (6)	Installation, connection, column testing	4–19
Commissioning engineer	Control system, test certificates, training	9

5 Quality, safety and environment

All installation crews hold the qualifications required by the national wiring rules and have completed training for work next to live traffic. Every working day starts with a short safety briefing at the site cabin. Our quality plan defines hold points at the end of each section, where the Town’s engineer can inspect the work before the next section starts.

Old lanterns and brackets are returned to a licensed recycler. The recycling certificates are handed over with the documentation. Deliveries are combined to keep the number of vehicle movements on the promenade low, and no materials are stored on the promenade overnight.

6 Handover

At handover we provide the as-built drawings, the test certificates for every column, the configuration of the control system and two days of training for the Town’s maintenance staff. The defects liability period starts on the date of the handover certificate.

Price schedule

All amounts in euros, excluding VAT. The amounts cover the scope described in the technical proposal.

Item	Description	Basis	Amount (EUR)
1	Site establishment and setting-out	lump sum	6,250.00
2	Supply of LED column luminaires, type PL-60	48 no.	52,800.00
3	Installation and connection of luminaires	48 no.	21,150.00
4	Control system and commissioning	1 system	9,750.00
5	Testing, documentation and handover	lump sum	3,900.00
6	Night-time traffic management	6 nights	4,200.00
	Total (excl. VAT)		**98,050.00**

Conditions

Prices are fixed until 31 December 2027. Columns that fail the structural test described in section 2.3 of the technical proposal are replaced at EUR 1,380.00 per column, including foundation work and disposal of the old column.

Work is invoiced monthly against the columns completed in that month. Invoices are payable within 30 days. A retention of 5 per cent is held until the end of the defects liability period of 12 months.

Our offer remains valid for 90 days from the closing date of the tender.

Insurance summary

Tender TR-0417 · Brackwater Lighting Co. · synthetic sample

Brackwater Lighting Co. holds the insurance policies listed below. The policies will be renewed for the duration of the contract and the defects liability period.

Cover	Limit per claim	Insurer	Expires
Public liability	EUR 10,000,000	Harbourline Mutual (fictitious)	31 March 2027
Employer's liability	EUR 5,000,000	Harbourline Mutual (fictitious)	31 March 2027
Contract works	full contract value	Northdeck Insurance (fictitious)	30 June 2027
Professional indemnity	EUR 2,000,000	Northdeck Insurance (fictitious)	30 June 2027


Certificates for each policy are available on request. The Town will be named as an additional insured on the public liability policy from the order date.

Product data sheet · Brackwater Lighting Co. · synthetic sample

PL-60 promenade luminaire

LED column luminaire for promenades, parks and residential streets.

Luminous flux	4,800 lm
Power consumption	36 W
Luminous efficacy	133 lm/W
Colour temperature	3,000 K
Colour rendering	Ra ≥ 80
Protection	IP66, IK09
Mounting height	4 to 8 m
Weight	6.2 kg
Operating temperature	−30 °C to +45 °C
Control	Zhaga socket with control node
Rated life	L90 at 100,000 h
Warranty	10 years

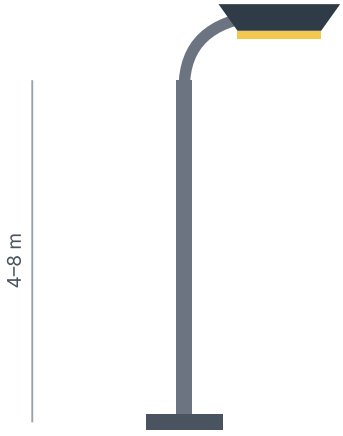

Side-entry mounting on a 60 mm spigot. Drawing not to scale.

Optics and maintenance

The flat glass cover keeps the upward light ratio at 0 per cent. The asymmetric lens directs the light along the promenade and keeps spill light off the water. The driver can be replaced on site without tools.

The housing is die-cast aluminium, powder-coated in a colour chosen by the client. All fixings are stainless steel.

Maintenance plan

Tender TR-0417 · Harbour Promenade Lighting Renewal (synthetic sample)

This plan covers the first five years after handover. All intervals are counted from the date of the handover certificate. Tasks marked “by others” are not part of our offer and are listed only so that the plan is complete.

Task	Interval	Carried out by
Visual inspection of luminaires and columns	every 6 months	Bidder
Cleaning of luminaire optics	every 12 months	Bidder
Check of control nodes and firmware updates	every 12 months	Bidder
Electrical test of feeder pillars	every 24 months	Bidder
Structural test of columns	every 60 months	Town (by others)

Faults reported through the control system are attended within 48 hours. A luminaire that has failed is replaced from the spare stock of four units held by the Town, and the spare stock is topped up at the next scheduled visit.

After each visit we send a short report listing the work done, the faults found and the luminaires replaced. Once a year we meet the Town’s maintenance staff to review the reports and agree any changes to the plan.

Method statement for night works

Tender TR-0417 · Harbour Promenade Lighting Renewal (synthetic sample)

This statement applies to all work on the carriageway side of the promenade between 20:00 and 05:00. It is read out at the start of every night shift.

1. The site supervisor confirms the traffic management layout with the Town's duty officer before 19:30.

2. Signs and cones are placed in the order shown in the traffic management plan, starting with the advance warning signs.

3. The lane is closed only after the last cone is in place and the supervisor has walked the closure.

4. Each crew works within the closed lane only. Lighting towers are pointed away from houses and from oncoming traffic.

5. Cutting and drilling stop at 23:00. Work after 23:00 is limited to connection, testing and clearing up.

6. The closure is removed in the reverse order by 05:00, and the supervisor reports the end of the shift to the duty officer.

If wind speeds exceed 18 m/s or visibility falls below 100 m, the supervisor stops the work and makes the site safe. Stopped shifts are recorded in the site diary.